

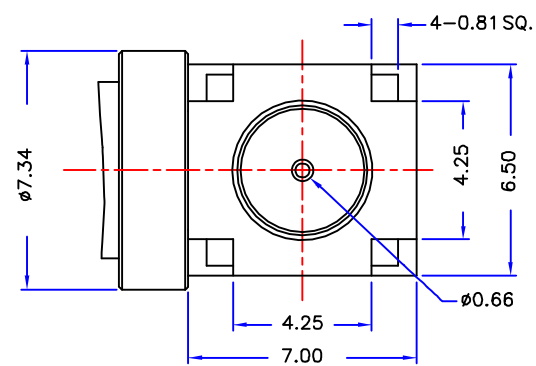


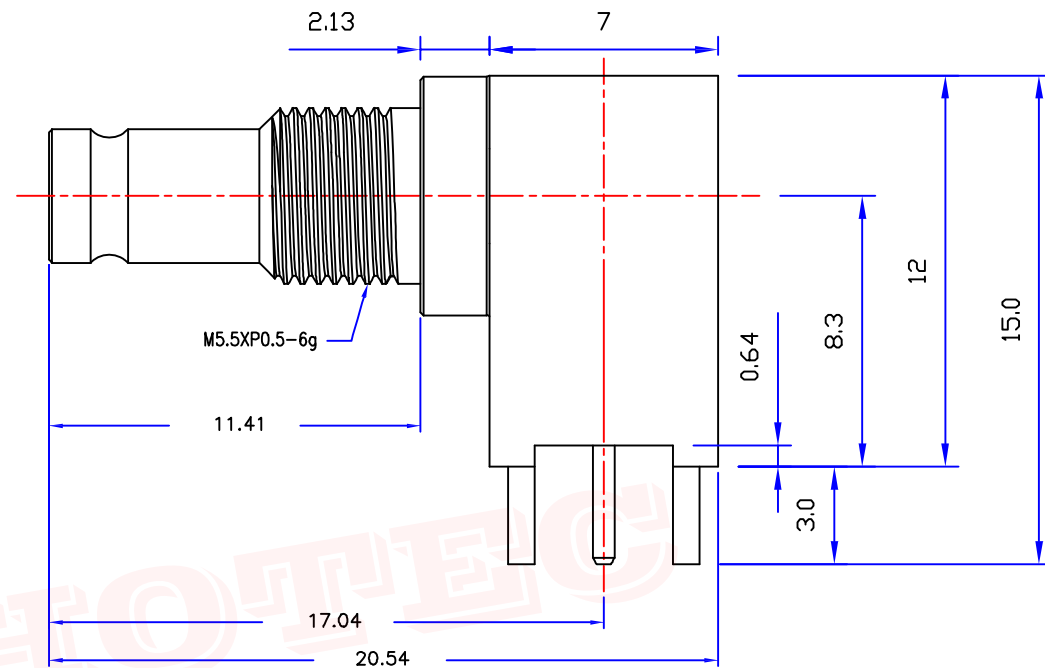

Product NO.		RHT-618-0710			
REV	DESCRIPTION	DWN	DATE	APPROVEN	
A	First issue	Gavin	2018/03/19	JIM. KING	

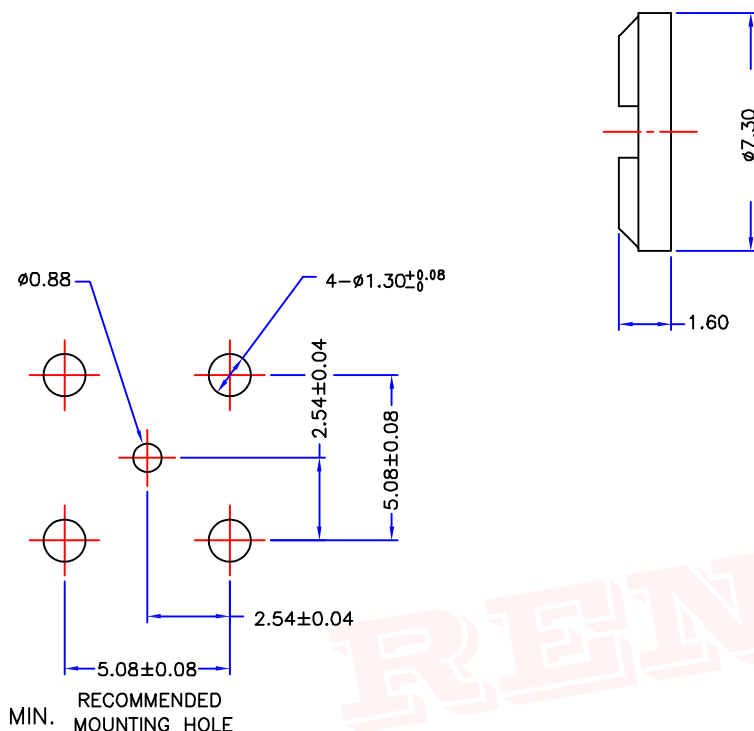

1. IMPEDANCE: 75 OHM
2. FREQUENCY RANGE: DC 0- 4 GHZ
3. VSWR(RETURN LOSS): 1.15, MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS,
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: -40°C TO +155°C

6	SPANNER NUT	BRASS	NICKEL	1
5	INSULATOR	PTFE	NATURAL	1
4	HOUSING	BRASS	BRIGHT TIN	1
3	INSULATOR	PTFE	NATURAL	1
2	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		RENHOTECH www.renhotec.com		RENHOTECH GROUP	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 -120mm ± 0.50mm		Appd: JIM. KING		PART DESCRIPTION: 1.0/2.3 R/A jack for PCB	
Check:		Date		Scale	Unit
Draw: Gavin		2018/03/19		Free	MM
				Type	Page
				Z	1/1